


TYPICAL DETAIL  
FOR LIP OF RAMP  
N.T.S.

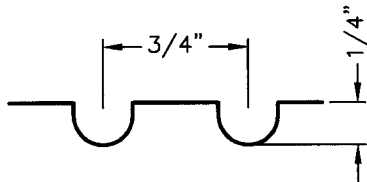

GROOVING DETAIL  
N.T.S.

- ① THE RAMP SHALL HAVE A 12" BORDER WITH 1/4" GROOVES APPROXIMATELY 3/4" ON CENTER. (SEE GROOVING DETAIL).
- ② WING LENGTH IS 6' FOR 6" CURB FACE, AND 8' FOR 8" CURB FACE..
- ③ DEEP TOOL JOINT.
- ④ 1/4" LIP (SEE DETAIL).

**NOTE:**

NOTE:  
MINIMUM RAMP THICKNESS SHALL BE 4" P.C.C. OVER 4" CLASS II A.B. OR OVER 6" OF NATIVE SUBGRADE. ALL AB AND/OR SUBGRADE SHALL BE PROCESSED TO 90% RELATIVE COMPACTION.

APPROVED BY:

*B. Johnson*  
BILLY JOHNSON  
CHIEF BUILDING OFFICIAL

*3/26/03*  
DATE

APPROVED BY:

*Jerry V. Jack*  
JERRY V. JACK  
INTERIM PUBLICS WORKS DIRECTOR

*3/26/03*  
DATE



City of Cathedral City  
Engineering Department  
68-700 Avenida Lalo Guerrero  
Cathedral City, Ca. 92234  
Ph. (760) 770-0349

PUBLIC WORKS/ENGINEERING DEPARTMENT

CURB RAMP  
TYPE II

STANDARD No. CC101